

ALPHA series



Multiled



8,5 mt. Max Height



Manual Lifting



Low Emissions



350° Rotation



Light sensor



Slow Trailer



*Carrello omologato EU su strada
Road tow trailer approved for UE
Chariot homologué EU sur route*

PRESTAZIONI – FEATURE – PERFORMANCE

Fari	Floodlights	Projecteurs	4 x 160W	6 x 160W	4 x 320W
Area illuminata	Lighting area	Surface éclairée	3300 mq	4200 mq	5000 mq
Lumen	Lumen	Lumen	81400	122100	166200
Frequenza / Tensione	Frequency / Voltage	Fréquence / Voltage	50 Hz / 230 V		
Temperatura di funzionamento	Operating temperature	Température de fonctionnement	-25° / 50° C		
Centralina	Controller	Coffret	DSE 3210		
Presa ausiliaria	Auxiliary socket	Prise auxiliaire	1,2 KVA		
Rumorosità a 7 mt.	Sound level at 7 mt.	Niveau de bruit à 7 mt.	65 dB (A)		
Crepuscolare	Light sensor	Capteur de luminosité	STD		

PALO – MAST – MÂT			
Altezza massima	Max height	Hauteur max	8,5 m
Sollevamento	Lifting	Levage	Manuale – Manual - Manuel
Sezioni del palo	Tower Section	Extensions	4
Rotazione	Turning angle	Rotation	350°
Resistenza massima al vento	Max wind rating	Résistance resistance au vent	110 Km/h

ENGINE 3000 rpm				
			KOHLER	YANMAR
Modello	Model	Modèle	15LD350	L70
Cilindrata	Displacement	Cylindrée	349 cc	320 cc
Capacità serbatoio	Fuel tank capacity	Capacité du réservoir	42 l	42 l
Autonomia con luci accese	Running time only lights	Autonomie avec lampes allumées	218 h	200 h
Tipo di combustibile	Fuel type	Type de carburant	Diesel	
Emissioni	Emissions	Émissions	STAGE V	
N. cilindri	Cylinders	N. de cylindres	1	
Tipo di raffreddamento	Cooling type	Type de refroidissement	Air	


ENGINE 1500 rpm				
			KOHLER	YANMAR
Modello	Model	Modèle	KDW 702	2TNV70
Cilindrata	Displacement	Cylindrée	686 cc	570 cc
Capacità serbatoio	Fuel tank capacity	Capacité du réservoir	105 l	105 l
Autonomia con luci accese	Running time only lights	Autonomie avec lampes allumées	180 h	180 h
Tipo di combustibile	Fuel type	Type de carburant	Diesel	
Emissioni	Emissions	Émissions	STAGE V	
N. cilindri	Cylinders	N. de cylindres	2	
Tipo di raffreddamento	Cooling type	Type de refroidissement	Acqua - Water - Eau	

CARRELLO – TRAILER – CHARIOT				
			SLOW	FAST
Pneumatici	Tyres	Pneus	155 80 R13	185 70 R13
Stabilizzatori manuali	Manual stabilizer	Stabilizateursmanuel	4 + 1 (ruota, wheel, roue)	
Tasche per inforco muletto	Forklift pockets	Poches pour chariot èlevateur	STD	
Vasca raccolta liquidi motore e carburante	Bounded tank engine liquids and fuel	Bac de retention liquides moteur et carburant	STD	

DIMENSIONI E PESO - DIMENSIONS AND WEIGHT - DIMENSIONS ET POIDS				
			SLOW	FAST
Dimensioni min	Min dimension	Dimensions min	1154x1118x2430 mm	2200x1505x2520 mm
Dimensioni max	Max dimension	Dimensions max	2030x2202x8500 mm	2200x2630x8500 mm
Peso a secco	Dry Weight	Poids a Sec	620 kg	



DISEGNI - DRAWS - DESSINS

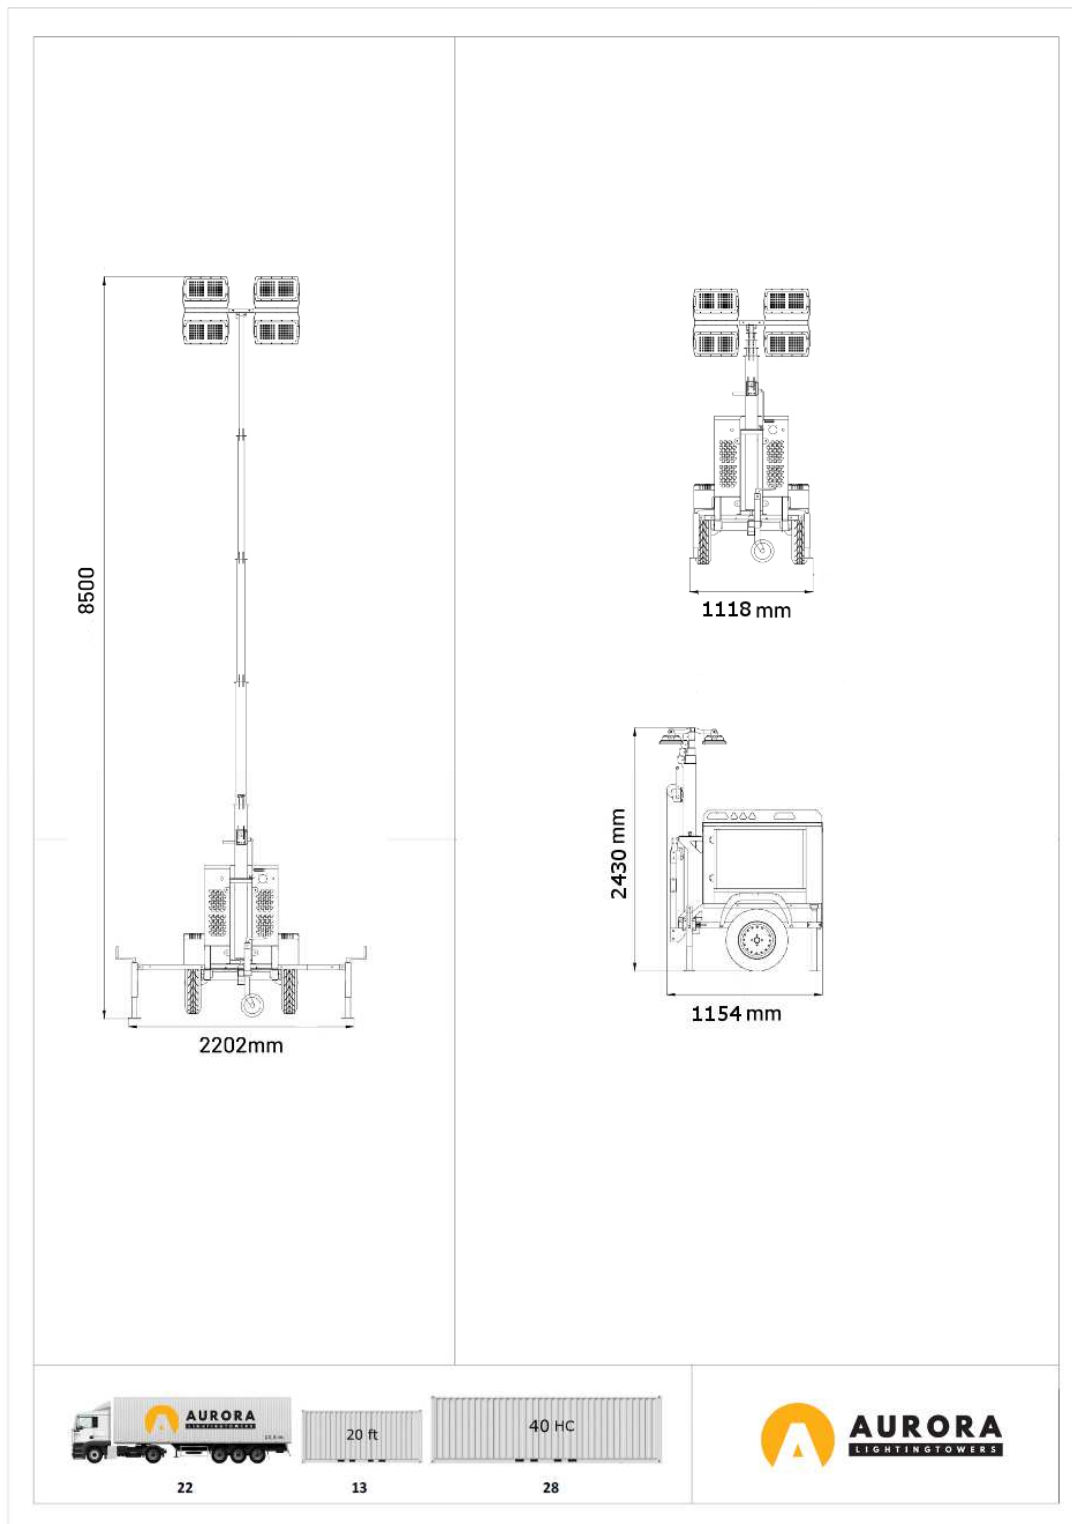

- Le specifiche tecniche sono soggette a variazioni senza preavviso
- The technical specifications are exposed to alterations without notice
- Nous nous réservons le droit de changer les spécifications techniques sans préavis